

BW UPS 1200-3000VA



Applications



Router/Wifi



Cash Register



Door Control



PC



Phone/Tablet



Camera



Drone

Main Features :

- LCD display or LED display for option.
- Excellent microprocessor control optimizes reliability.
- Built super smart charger, shorten charging time.
- Boost and buck AVR for voltage stabilization.
- Simulated sine wave.
- Auto restart while AC is recovering.
- Power - on self test.
- Built-in self-diagnostic function.
- Off mode charging function .
- Intelligent battery management.
- Optional no-load shut down .
- Humanized alarm system .
- Compatible with generator set (optional).
- Optional RS23/USB communication port and RJ11/RJ45 protection.

Line Interactive UPS




Specifications :

MODEL	BW1200	BW1500	BW2000	BW3000
Capacity	1200VA/720W	1500VA/900W	2000VA/1200W	3000VA/1800W
INPUT				
Voltage	220VAC			
Voltage Range	140-290 VAC / 140-300VAC		140-268 VAC / 170-280VAC	
OUTPUT				
Voltage Regulation	+/-10%			
Transfer Time	Typical 2-6ms, 10ms max			
Waveform	Simulated Sine Wave			
BATTERY				
Type & Number	12V/7AH x 2	12V/9AH x 2		12V/9AH x 4
Charging Time	6 Hours recover to 90% capacity			
PHYSICAL				
Dimension D*W*H(mm)	370x138x166			466X138X166
Net Weight (kgs)	9	10	11	19
ENVIRONMENT				
Humidity	0-90% RH @0-40C (non-condensing)			
Noise Level	Less than 40 dB			

Rear Panel :

- AC input.
- Output Socket (selectable).
- TEL/Modern/Fax surge protection (RJ11/RJ45) (optional).
- USB/RS232 communication (optional).
- AC Fuse/Breaker (optional).

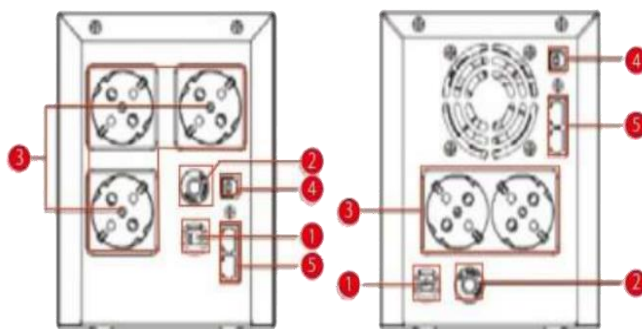

- 1 Ac Input
- 2 AC Input fuse/ Breaker
- 3 Output Receptacles
- 4 USB Connector (Optional)
- 5 Network surge protection (Optional).

All Specifications subject to change without notice

Custom-made specifications are acceptable

